


LHM-2000

LOG HOME MACHINE



HOLYTEK
HOLYTEK INDUSTRIAL CORP.

9F-1, No. 400, Sec. 1, Chang Ping Rd.,
Taichung 406, Taiwan
Tel: 886-4-2245-2818 (REP.)
Fax: 886-4-2243-6928
holytek@holytek.tw
www.holytek.com.tw

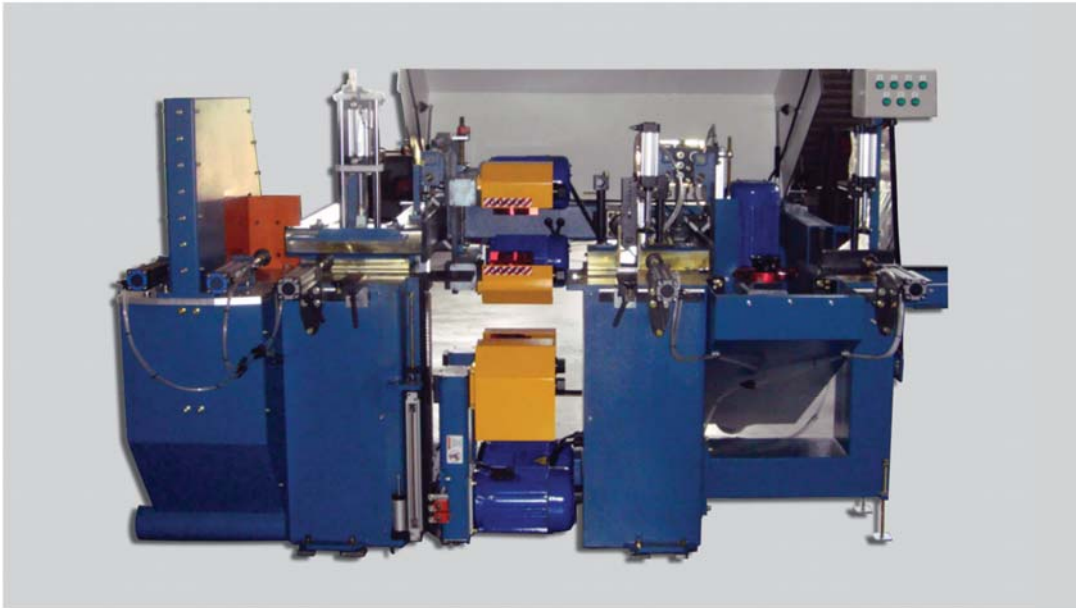

Position 1. Milling

The number of main spindles: 4

Diameter of spindles: 40mm

Maximum width of workpiece: 245mm

Maximum height of workpiece: 250mm

Power of motor: 7.5HP

Diameter Aspiration holes: 250mm





Position 2. Cutoff Saw

Diameter of spindles:40mm

Maximum width of workpiece: 245mm

Power of motor:7.5HP

Diameter Aspiration holes:100mm

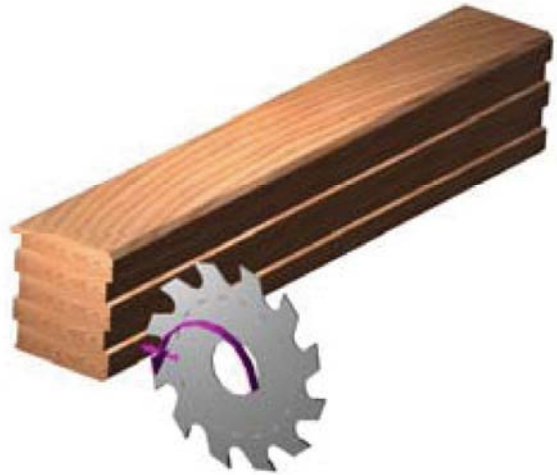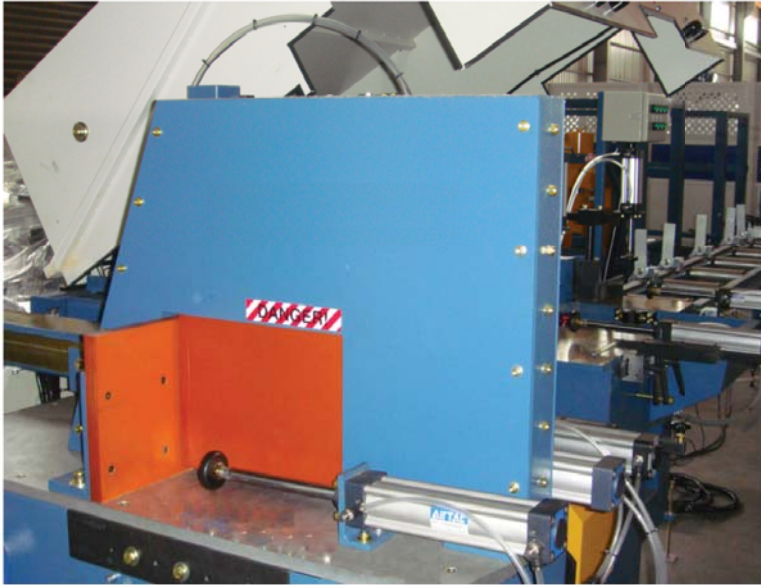


Position 3. Drilling

Diameter of driller:12~35mm

Length of driller:220~320mm

Power of motor:3HP

Diameter Aspiration holes:150mm

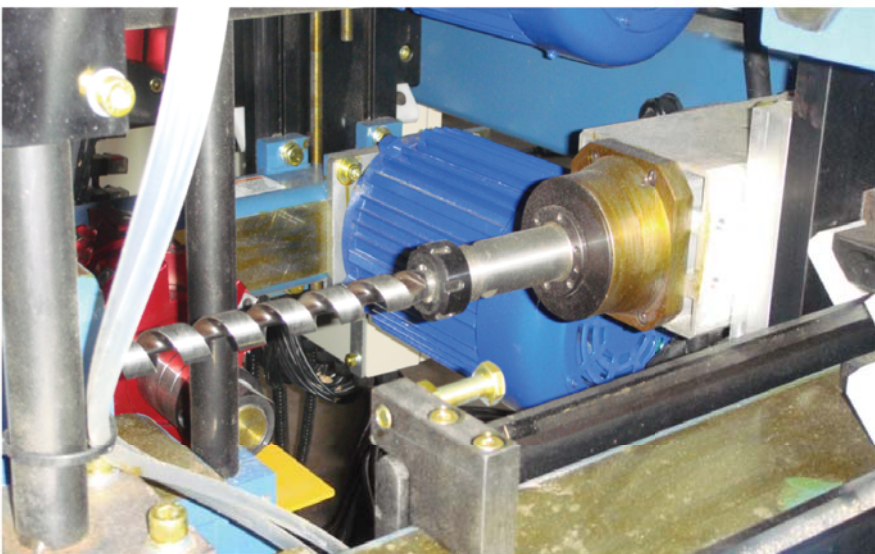


Position 4. Notching

Max. diameter of tool:230mm

Diameter of spindle:30mm

Power of motor:7.5HP

Diameter Aspiration holes:150mm

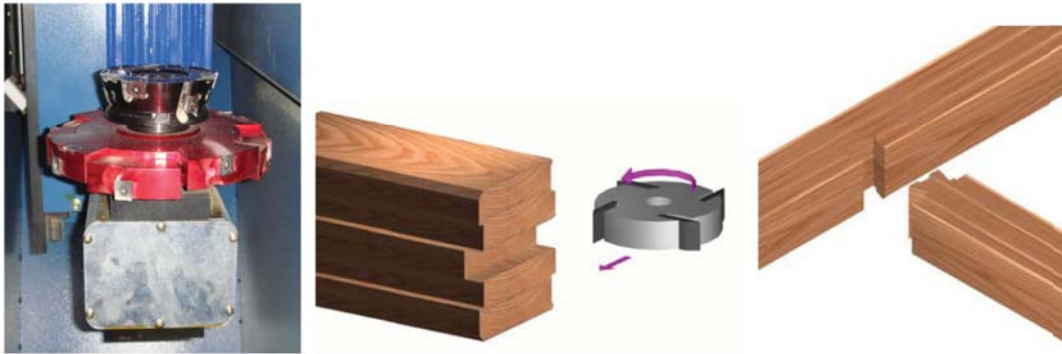

Position 5. Feeding conveyor

Length of feeding conveyor:6m infeed & outfeed

With 7 stops



Notching Machine AN-423




AN-423 is designed for making corner jointer notches for rectangular logs.


Possible notching models:

- Complete four-sided notching
- Complete four-sided notching at log end
- Side notching
- Upper notching / bottom notching

The machine is equipped with four notching units, two on horizontal guides and two on vertical guides. Movements of the notching units are performed by means of hydraulic cylinders.

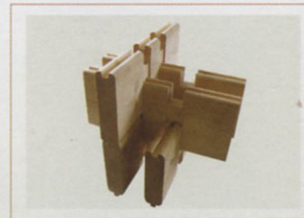

Double match

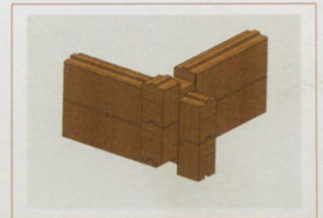

Single match

SPECIFICATIONS

Log Thickness(Max.)	230mm	Vertical Notching Unit	
Log Width (Max.)	230mm	Spindle Diameter	50mm
Notching Depth (Max.)	70mm	Cutterhead Length (Max.)	200mm
		Cutterhead Diameter (Max.)	230mm
		Spindle Speed	4000rpm
Motor Powers		Horizontal Notching Unit	
Horizontal Notching Unit	5HP*2	Shft Diameter	50mm
Vertical Notching Unit	5HP*2	Cutterhead Length (Max.)	200mm
Hydraulic Unit	3HP	Cutterhead Diameter (Max.)	230mm
Total Power	23HP	Spindle speed	4000rpm